

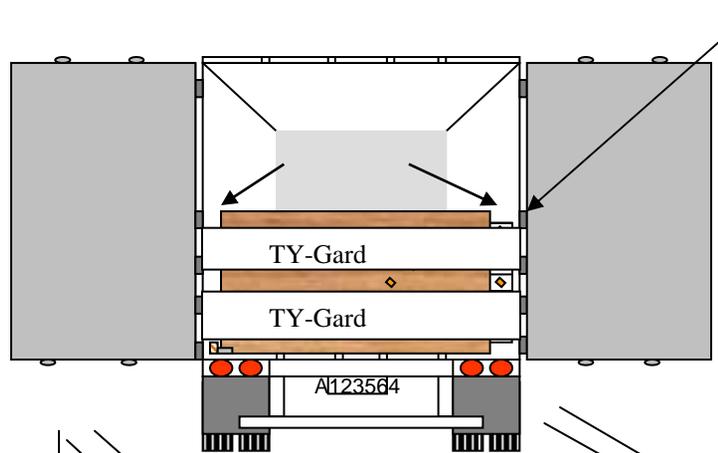


TY- Gard Installation

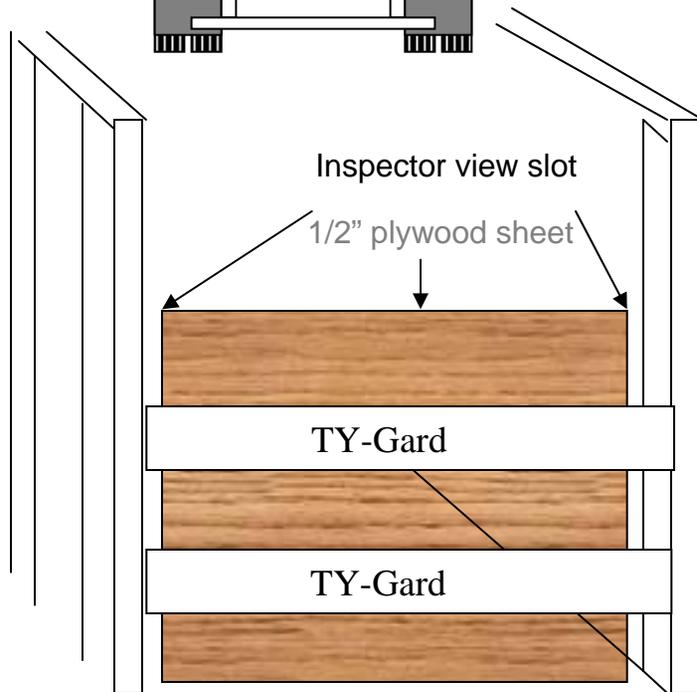

INSPECTOR VIEW
SLOTS (Center or side)

Note: VIEW SLOTS SHOULD BE LARGE ENOUGH TO VIEW, PACKAGING, METHOD OF LOADING, BUT NOT LARGE ENOUGH TO ALLOW PACKAGE TO FALL THROUGH VIEWING VOID.

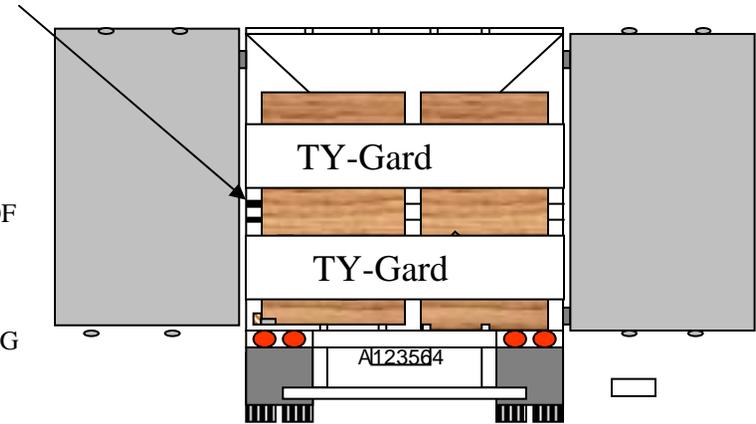

Ty-Gard can be used as a longitudinal restraint.
Rule of thumb: 1 strip for every 8,800 lbs. of cargo. Must glue to side wall , minimum of 5 ft.

This load plan is intended for general information purposes only and is not recommended for any specific cargo. Other Carriers are not required to accept this load plan or any plan suggested by Union Pacific Railroad. This information is offered to shippers to assist in understanding the rail environment, the shipper is ultimately responsible for choosing how best to package, block and brace its cargo to avoid damage to the cargo and rail equipment.

	Union Pacific Damage Prevention
	File: Ty-gard Installation
	Date: 8/6/03 By:WLR