

# Double Laminated Floor Blocking

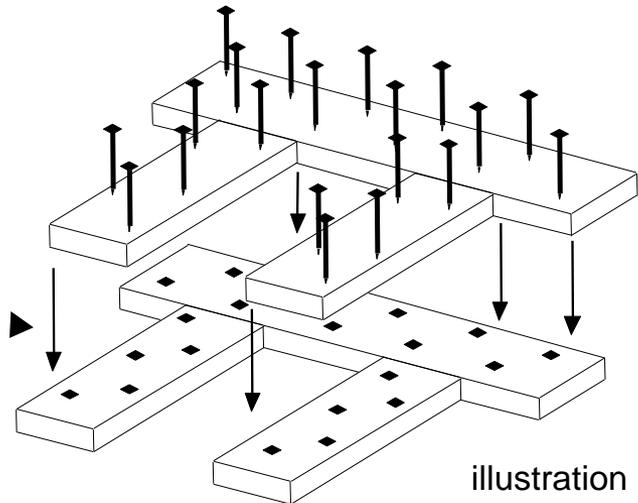


illustration 1



**Floor blocking should be constructed with double 2x4 or 2x6 lumber with backup cleats, at least 18 inches long. Floor blocking needs to be as long as the pallet or unit it is supporting. Nails should be staggered and spaced approximately 4 to 5 inches apart. 16d nails (or larger) are required.**