



# Pinwheel & Floor Blocking Load Plan for 40 x 48 pallets

20 Pallets in 1 Group

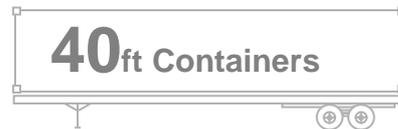


## Side Wall Cutaway View

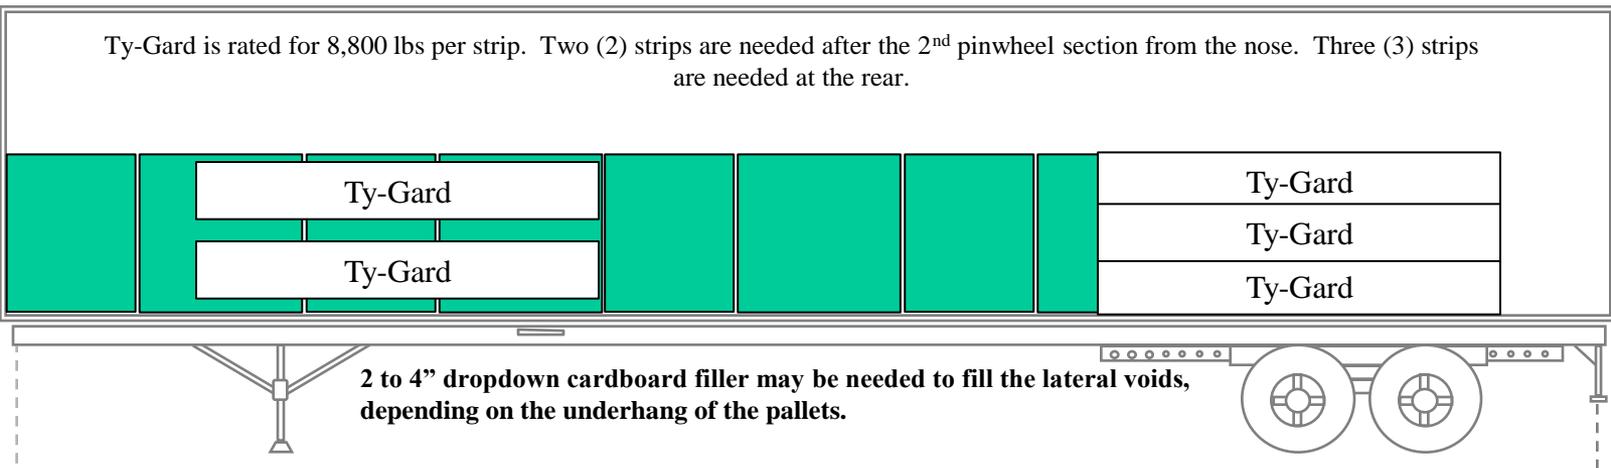

473" (interior length)

## Overhead View

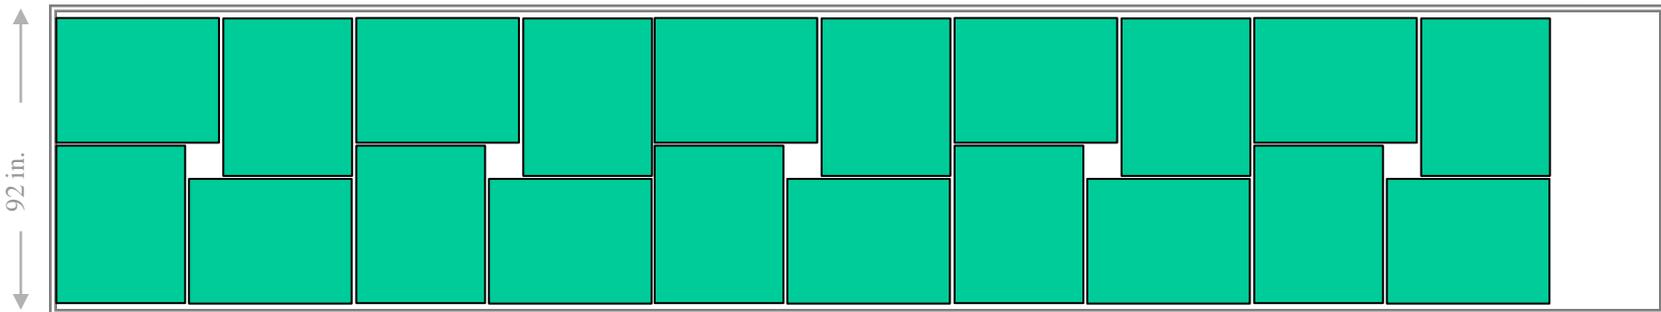

Lading needs to be properly stretch wrapped so the loads are unitized to the pallets.


**NOT TO SCALE**

	Union Pacific Damage Prevention
	File: 40x48 pinwheel & floor blocking
	Date: 4/30/2010 By: TJP

# Recommendation for Stretch Wrap



- 100 gauge stretch wrap, 30” wide
- Pre-tensioned 150% with four full wraps per stack.
- Set top and bottom layer count to four wraps
- Adjust roll carrier speed to allow film wrap to overlap the previous applied layer by 15 inches.
- Turn-table speed must be adjusted to allow application of 4 top layers .

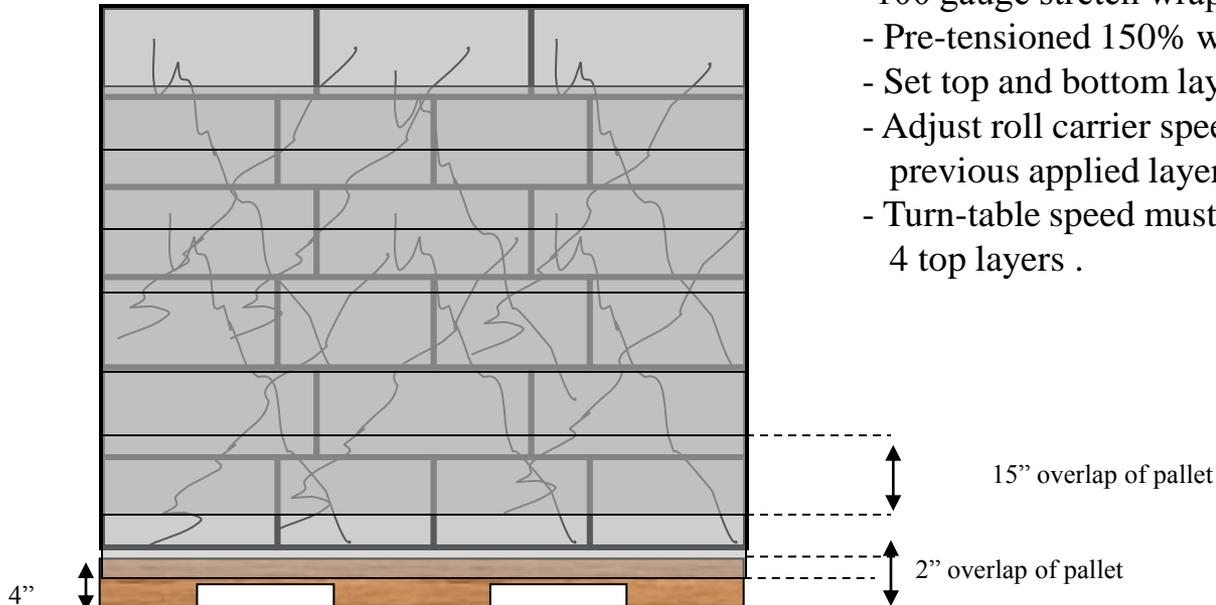

**Four full wraps per pallet**  
with 2” overlap to the pallet and top of the load