


Recommendation for Stretch Wrap



- 100 gauge stretch wrap, 30” wide
- Pre-tensioned 150% with four full wraps per stack
- Set top and bottom layer count to four wraps
- Adjust roll carrier speed to allow film wrap to overlap the previous applied layer by 15 inches
- Turn-table speed must be adjusted to allow application of 4 top layers

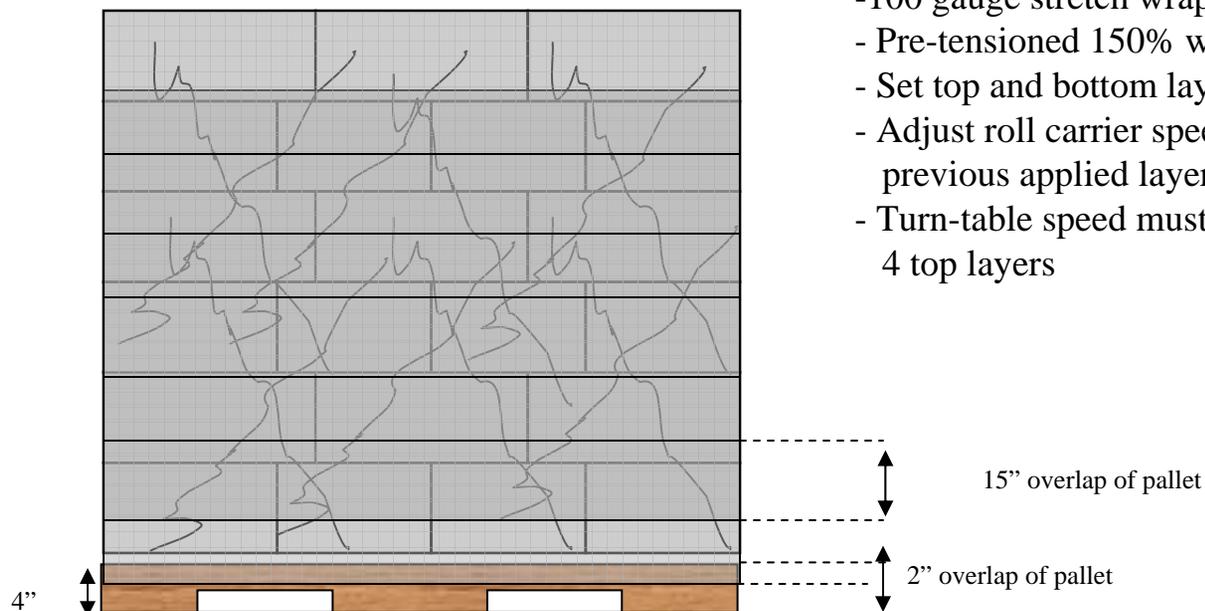

Four full wraps per pallet
with 2” overlap to the pallet and top of the load

This load plan is intended for general information purposes only and is not recommended for any specific cargo. Other Carriers are not required to accept this load plan or any plan suggested by Union Pacific Railroad. This information is offered to shippers to assist in understanding the rail environment, the shipper is ultimately responsible for choosing how best to package, block and brace its cargo to avoid damage to the cargo and rail equipment.



Union Pacific Damage Prevention
File: Stretch wrap to pallet
Date: 04/19/05 By: EOW