




LAT-LON GPS Impact Monitoring Device Installation

TO MONITOR;
Website: www.lat-lon.com

Logon as user
user id:
password:

TO ASSIGN:
Logon as admin
Same user id & P/w as above

- Remove, hold and carry unit with the cord at the top of unit
- Install 9 volt battery on back to charge device 1 hour prior to installation. Place unit to be able to
- “see” the southwestern sky clearly to charge and acquire the GPS satellite. Verify reporting on web page.
- Select external installation location on railcar
 - higher better
 - flat
 - Side of rail car OK, just to the left of rail car door.
 - Relatively clean and dirt free..
- Position unit upright, top up and level.
- Continue to hold cord handle and mount bottom of the unit first **SLOWLY** move unit to car to avoid a hard snap on the car. **Watch your fingers the magnets are strong.**
- Adjust for squareness with white top up and parallel to car floor.
- Record rail car number and installation location of unit.
- FAX installation data sheet to: Union Pacific **402 / 233-3346**

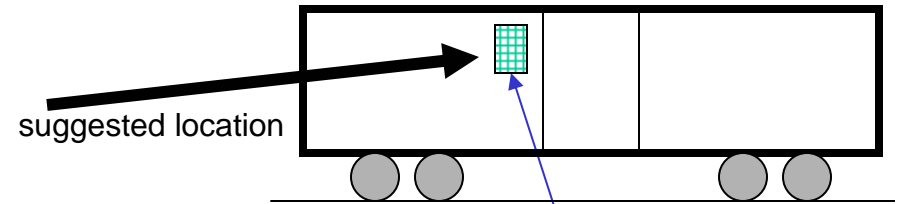

Please note on the above drawing
the actual location that the unit was installed

RAIL CAR # _____ RECORDER, nnnnnnn

ORIGIN _____ DESTINATION _____ Date _____

If you have any questions regarding installation
please call Judi Perrin, Union Pacific, 402/544-3540



BUILDING AMERICASM