

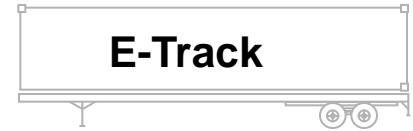


E-Clips and E-Track Usage

E-Track

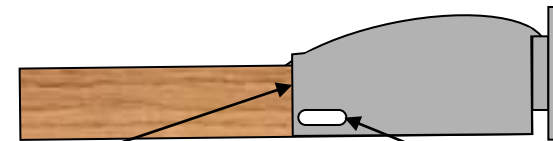

E-Track equipment extends approximately 6 ft. from the doors in 53 ft. and approx. 3.5 ft. in 48 ft. equipment.

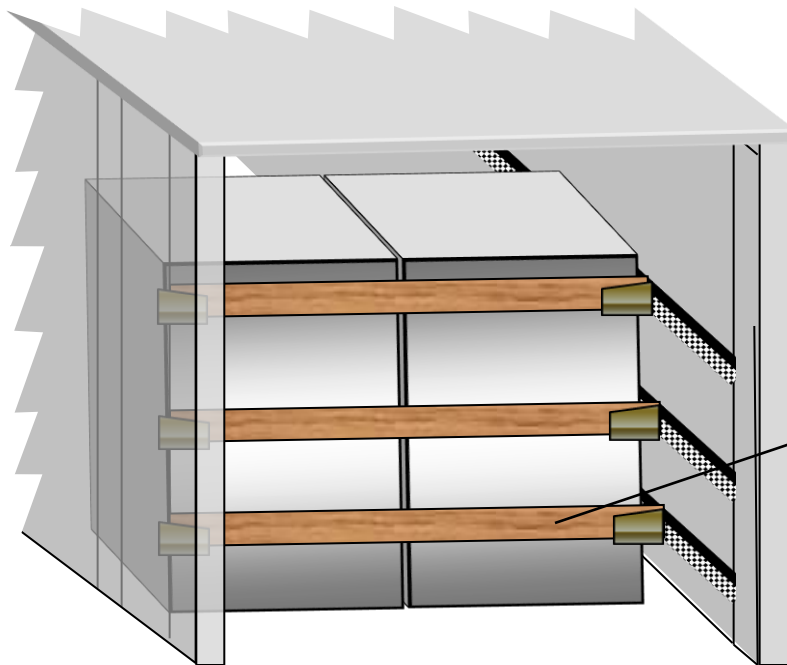

Nail securement hole

2x6 lumber is installed into the track hardware and placed against the cargo to restrain the pallets from any longitudinal movement.

This load plan is intended for general information purposes only and is not recommended for any specific cargo. Other Carriers are not required to accept this load plan or any plan suggested by Union Pacific Railroad. This information is offered to shippers to assist in understanding the rail environment, the shipper is ultimately responsible for choosing how best to package, block and brace its cargo to avoid damage to the cargo and rail equipment.